

Sakase Chemical Co.,Ltd.
Products Catalog for Storage/Transportation of Precision Parts and Tools

Represented by:



CCT Europe B.V.

Bindersestraat 31-D,
5701SX Helmond,
The Netherlands.

✉ cct@cct-europe.com


☎ +31 (0)492 780178

🌐 www.cct-europe.com


Tac & Carrier

Products Catalog for Storage/Transportation of Precision Parts and Tools

Sakase




Sakase Chemical Co.,Ltd




Best contribution for improving productivity and operating efficiency


These products are ideal for storing, transporting, protecting or holding various parts for sensor/actuator, discrete, opt-electronic, semi-conductor, electronic parts, precision parts, fixtures or tools. These products will satisfy wide range of needs from Research & Development, Assessment Department, Production Department and Inspection Department to Shipping Department.

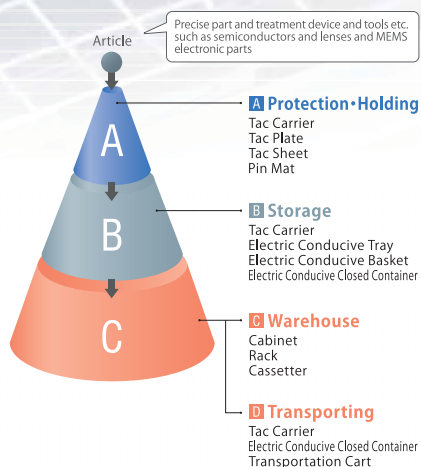

Production Department

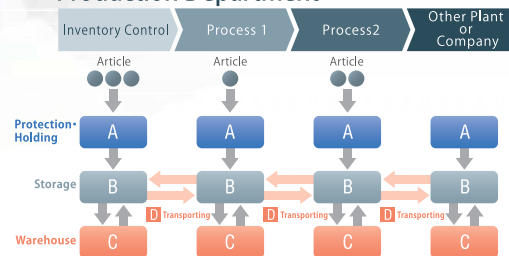

Research and Development Department

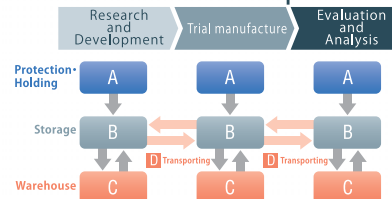

《Explanation of Characteristic》

Low out-gassing	Low out-gassing and Low ionic
Conductive	Electric conductive with Anti-static measure
Anti-static	Low electric conductive with Anti-static measure
Adhesion	Adhesive products. You can select adhesiveness
Heat resistance	Excellent heat resistance
Chemical resistance	Excellent chemical resistance
Air tightness	Excellent air tightness
Quietness	Quiet at time of movement
Anti-vibration	Less vibration and noise at time of movement
Shutter with key	With key to prevent dusts coming in

	Low out-gassing	Conductive	Anti-static	Adhesion	Heat resistance	Chemical resistance	Air tightness	Quietness	Anti-vibration	Shutter with Key	Appearance Page
Tac Carrier	●	● Body	● Cover	●	—	—	—	—	—	—	03
Tac Tray	●	●	●	●	—	—	—	—	—	—	07
Tac Plate (Clean Type)	—	●	—	—	—	—	—	—	—	—	09
Tac Plate (Heat resistance-Chemical resistance Type)	—	—	—	—	●	●	—	—	—	—	09
Pin Mat (Conductive Silicone Type)	—	●	—	—	—	—	—	—	—	—	10
Pin Mat (Silicone Type)	—	—	—	—	—	—	—	—	—	—	10
Tac Sheet (Non-silicone Type)	●	—	—	●	—	—	—	—	—	—	11
Tac Sheet (Conductive Silicone Type)	—	●	—	●	●	●	—	—	—	—	11
Tac Sheet (Silicone Type)	—	—	—	●	●	●	—	—	—	—	11
Electric Conductive Closed Container (Conductive)	—	●	—	—	—	—	●	—	—	—	15
Electric Conductive Closed Container (Anti-static/Conductive)	—	● Body	● Cover	—	—	—	—	—	—	—	15
Electric Conductive Tray	—	●	—	—	—	—	—	—	—	—	17
Electric Conductive Basket	—	●	—	—	—	—	—	—	—	—	17
Compact Cart	—	—	—	—	—	—	—	●	—	—	19
Aluminum Cart	—	—	—	—	—	—	—	—	—	●	21
Anti-vibration Cart	—	—	—	—	—	—	—	—	●	—	21

>>> P03

Tac Carrier

Low out-gassing Conductive Anti-static Adhesion

>>> P07

Tac Tray

Low out-gassing Conductive Adhesion

>>> P09

Tac Plate

Low out-gassing Conductive Adhesion Heat resistance Chemical resistance

Pin Mat

Conductive Heat resistance Chemical resistance

>>> P11

Tac Sheet

Low out-gassing Conductive Adhesion Heat resistance Chemical resistance

>>> P15

Electric Conductive Closed Container

Conductive Anti-static Air tightness

>>> P17

Electric Conductive Tray and Basket

Conductive

>>> P19

Transportation Cart

Quietness Anti-vibration Shutter with Key

Tac Carrier

Tac Tray

Tac Plate - Pin Mat

Tac Sheet

Electric Conductive Closed Container

Electric Conductive Tray and Basket

Transportation Cart



Tac Carrier® PAT.P

>>> Tac Carrier

- The body is made from low out-gassing electric conductive resin and the cover is made from clear anti-static resin.
- The low out-gassing adhesive sheet is made from non-silicone material. There will be no movement of adhesive portion or transcription.
- Adhesiveness and elasticity of the sheet absorbs impacts, protecting and holding carrying articles, yet articles on it can easily be picked up.
- Various degree of adhesiveness copes with variety of articles to be carried.
- Opening and closing of the cover is easy and handling of articles is easy.
- Cases can be stacked up, which contribute to efficient use of space.
- The printing of different line pattern, words or company logo can be arranged at minimum additional cost.
- Adhesive force 51 type has strong holding power, yet setting and picking up of article are easy, which assures easiness of handling carriers.






pile


Pointview of Item No.

A - 01BC - 10 00

Part No. Adhesive Force Printing Pattern


Part No.	Adhesive Force	Printing Pattern
A - 01BC 	No Tac Sheet 00	00 (4×6 squares) ID: 7×7mm
	● 10	05 (4×5 squares) ID: 7×8.3mm
	● 20	06 (10×10 squares) ID: 2.8×4mm
	● 30	50 (No Printing)
	● 40	
	● 50	
A - 02BC 	No Tac Sheet 00	10 (5×20 squares) ID: 11×3.4mm
	● 10	11 (10×20 squares) ID: 5.2×3.4mm
	● 20	12 (4×5 squares) ID: 15×15mm
	● 30	50 (No Printing)
	● 40	
	● 50	
A - 05BC 	● 01	50 (No Printing)
	● 30	

Adhesive Force

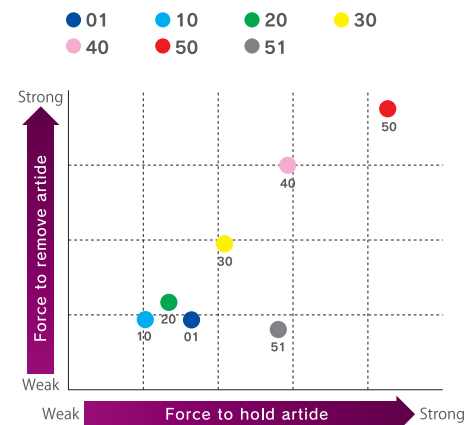


※ Adhesive force differs depending on shape, size, material, surface condition.

Printing Pattern

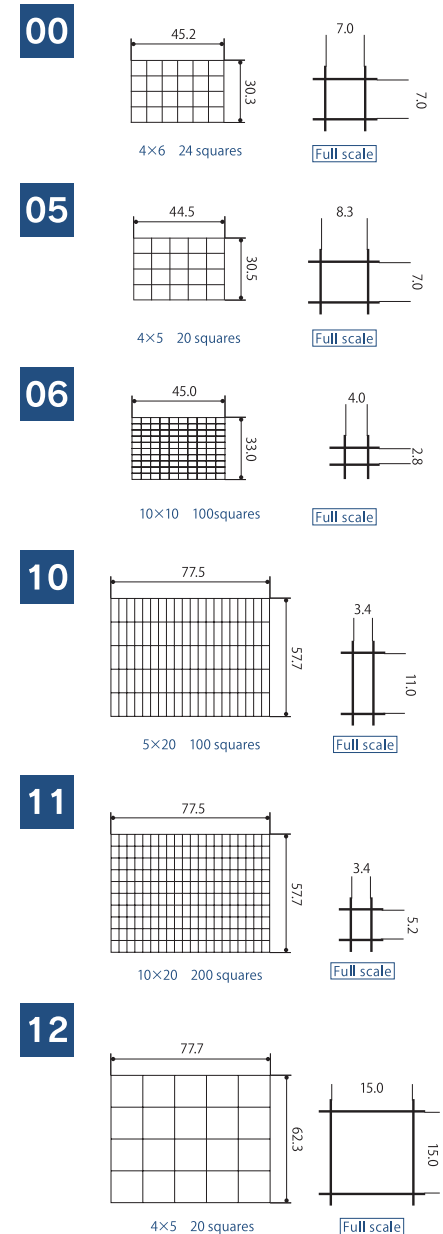

Tac Carrier solves problems!!

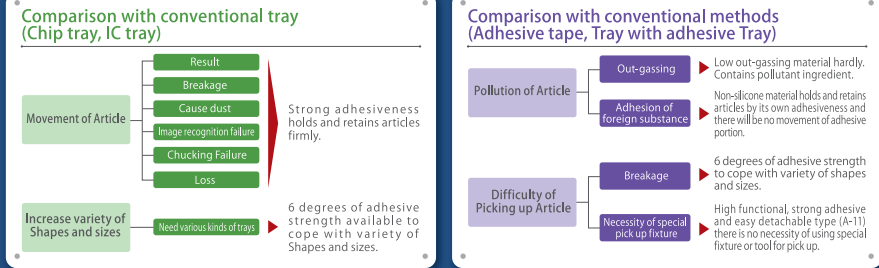

Tac Carrier A-11BC/A-22BC

Low out-gassing Conductive Anti-static Adhesion

Strong adhesion allows easy pick-up!! (Utility Model registered)

- Special sheet with high adhesive effect and without vacuum contact securely holds articles, but allows easy pick-up (removal of article).
- Easily detachable by tweezers or vacuum wand.
- Protect from shock or vibration and retain by strong holding power.
- Suitable for transport of fragile and ultra-thin precision parts.
- Adhesive force 51 type is less easy to remove article than adhesive force 10 type, has equivalent holding power to adhesive force 40 type, and needs no vacuum equipment for pick-up.

A-11BC

Dimensions W80×D56×H10mm
Sheet : 60×42mm

Material Body : Conductive polycarbonate
Cover : Anti-static polycarbonate
Sheet : Non-silicone

Surface resistivity Body:10²⁻⁵Ω/□
Cover:10¹²Ω/□

Heat resistance Max90℃



A-22BC

Dimensions W120×D85×H15mm
Sheet : 96×71mm


Material Body : Conductive polycarbonate
Cover : Anti-static polycarbonate
Sheet : Non-silicone

Surface resistivity Body:10²⁻⁵Ω/□
Cover:10¹²Ω/□

Heat resistance Max90℃



Part No.	Adhesive Force	Printing Pattern
A - 11BC	● 51	00 (4×6 squares) ID: 7×7mm
		05 (4×5 squares) ID: 7×8.3mm
		06 (10×10 squares) ID: 2.8×4mm
		50 (No printing)
A - 22BC	● 51	10 (5×20 squares) ID: 11×3.4mm
		11 (10×20 squares) ID: 5.2×3.4mm
		12 (4×5 squares) ID: 15×15mm
		50 (No printing)



Tac carrier A-01BC

Low out-gassing Conductive Anti-static Adhesion





Dimensions W80×D56×H10mm
Sheet : 60×42mm

Material Body : Conductive polycarbonate
Cover : Anti-static polycarbonate
Sheet : Non-silicone

Surface resistivity Body:10²⁻⁵Ω/□
Cover:10¹²Ω/□

Heat resistance Max90℃



Tac carrier A-02BC

Low out-gassing Conductive Anti-static Adhesion




Dimensions W120×D85×H15mm
Sheet : 96×71mm

Material Body : Conductive polycarbonate
Cover : Anti-static polycarbonate
Sheet : Non-silicone

Surface resistivity Body:10²⁻⁵Ω/□
Cover:10¹²Ω/□

Heat resistance Max90℃



Tac carrier A-05BC

Low out-gassing Conductive Anti-static Adhesion




Dimensions W56×D28×H9mm
Sheet : 42×18mm

Material Body : Conductive polycarbonate
Cover : Anti-static polycarbonate
Sheet : Non-silicone

Surface resistivity Body:10²⁻⁵Ω/□
Cover:10¹²Ω/□

Heat resistance Max90℃





Tac Tray


>>> Tac Tray

It has strong adhesive power but articles on it can be picked up easily. (Practical new idea registration pending)

- The tray is made from low out-gassing and electric conductive resin.
- The low out-gassing adhesive sheet is made from non-silicone material. There will be no movement of adhesive portion or transcription.
- Adhesiveness and elasticity of the sheet absorb impacts, and protect and hold carrying articles firmly and safely.
- The special sheet is highly adhesive. It holds articles on it firmly, but picking them up from it is easy. Therefore it is suitable for transporting precision, fragile or thin articles.
- There is no need for vacuum finger or other special tools to pick up articles.
- It can be used as a 4 inch chip tray.
- There is no need to change trays due to size and shape of articles.
- It can be stuck up which makes efficient use of space possible.


Tac Tray G-47BX-5150/G-48BX-5150

Low out-gassing Conductive Adhesion

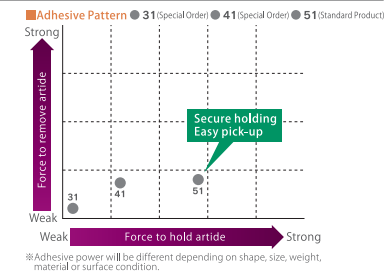


Tac Tray 7mm G-47BX-5150

Low out-gassing Conductive Adhesion

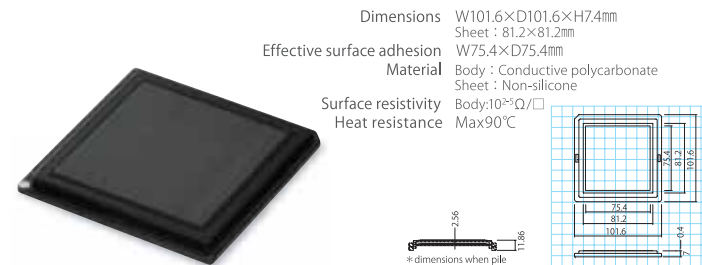

Tac Tray 8mm G-48BX-5150

Low out-gassing Conductive Adhesion

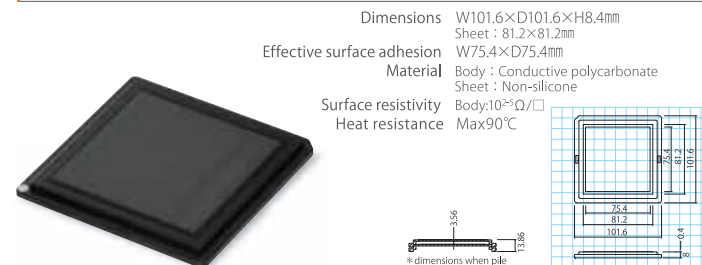

Option G-4C (Tac tray case)

Low out-gassing Conductive

Dimensions W120×D130×H17mm
Material Body : Conductive polycarbonate
Surface resistivity Body: $10^{2-5} \Omega/\square$
Heat resistance Max90°C



Option G-4F (Tac tray cover)

Low out-gassing Anti-static

Dimensions W101.6×D101.6×H8mm
Material Body : Anti-static polycarbonate
Surface resistivity Body: $10^{12} \Omega/\square$
Heat resistance Max90°C



Tac Carrier

Tac Tray

Tac Plate - Pin Mat

Tac Sheet

Electric Conductive Closed Container

Electric Conductive Tray and Basket

Transportation Cart



Tac Plate®


>>> Tac Plate

- Two types are available. One Low out-gassing clean type, and other Heat and chemical resistance type.
- Clean type uses low out-gassing and electric conductive PC resin plate and low out-gassing non-silicone adhesive sheet.
- Heat and chemical resistance type uses PEI resin plate and silicone adhesive sheet.
- Adhesiveness and elasticity of the sheet soften impacts, and hold and protect articles safely.
- With variety of adhesive force it can be applied wide range of article to be handled.
- The printing of different line pattern, words or company logo can be arranged at minimum additional cost.

Tac Plate B-01BH

Low out-gassing clean type


Low out-gassing Conductive Adhesion



Tac Plate B-01ES

Heat and chemical resistance type

Adhesion Heat resistance Chemical resistance




Item No.	Dimensions	Material	Adhesive Force	Remarks
B-01BH-10	Plate: W120×D78×H2.5mm Sheet: 96×71mm	Plate: Conductive polycarbonate Sheet: Non-silicone	● 10	Surface resistivity: (Plate) 10 ⁻⁴ Ω/□ Heat resistance: Max90°C
B-01BH-20			● 20	
B-01BH-30			● 30	
B-01BH-40			● 40	
B-01BH-50			● 50	
B-01ES-30	Plate: W120×D78×H3mm Sheet: 96×71mm	Plate: Polyetherimide Sheet: Silicone	● 30	Heat resistance: Max180°C

Weak → Strong

Adhesion10 Adhesion20 Adhesion30 Adhesion40 Adhesion50

*Adhesive force differs depending on material.

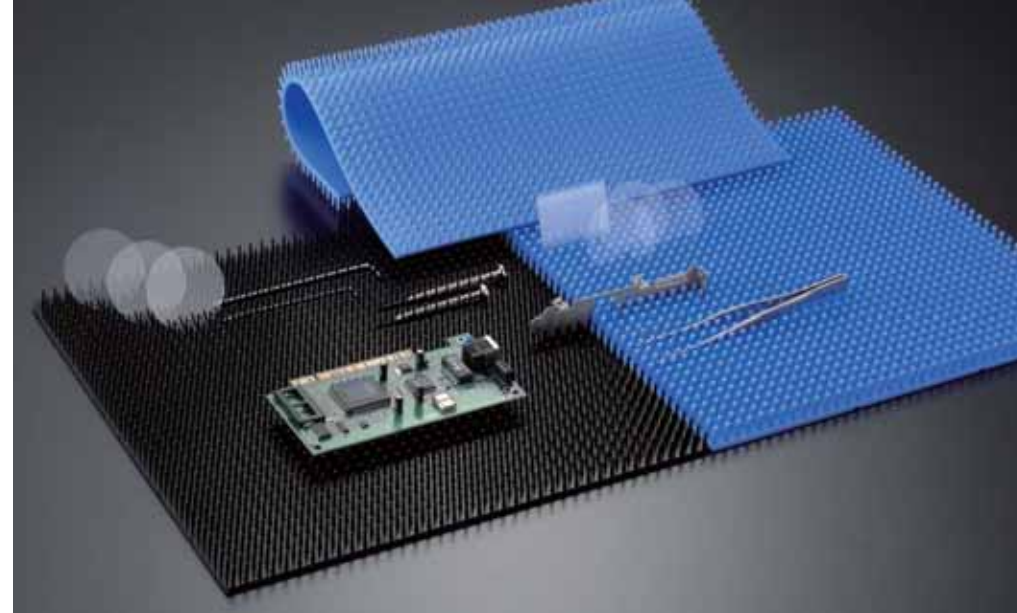

Pin Mat


>>> Pin Mat

- Two types are available. One Silicone type and other Electric conductive silicone type.
- Excellent in chemical and heat resistance.
- Hold various types of precision parts, assembling parts fixtures or tools soft pins on the surface.
- Elasticity of the sheet soften impacts from outside.
- Can be cut adequate sizes easily depending on the size of articles to be handled.

Pin Mat E-01S-30

Conductive silicone type


Chemical resistance Heat resistance Conductive



Pin Mat PMat S

Silicone type


Chemical resistance Heat resistance




Pin Mat PMat L

Silicone type

Chemical resistance Heat resistance



Item No.	Dimensions	Material	Diameter of tip	Color	Remarks
E-01S-30	304×304×t15mm	Conductive silicone	φ1.5	Black	Volume resistivity: 25Ω·cm Heat resistance: Max200°C
PMat S	304×304×t15mm	Silicone	φ1.5	Blue	Heat resistance: Max200°C
PMat L	304×304×t15mm	Silicone	φ3	Blue	

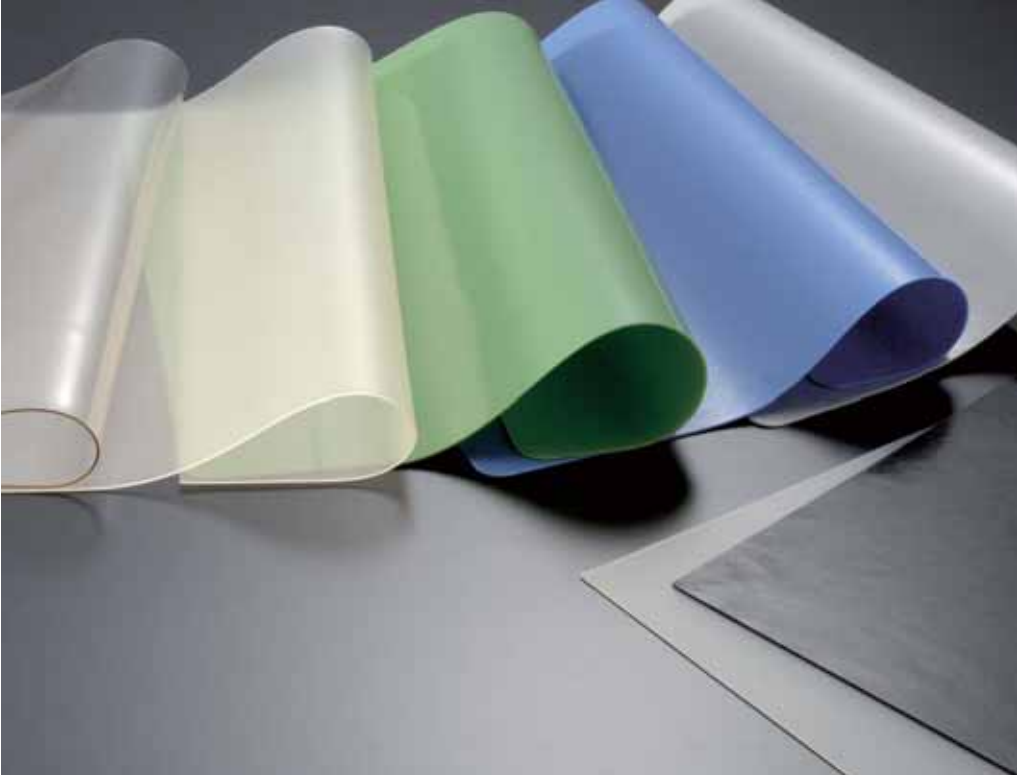

Tac Sheet

>>> Tac Sheet

- Three types are available. One Non-silicone type, Electric conductive type and other Silicone type.
- Non-silicone type is low out-gassing and there will be no movement of adhesive portion or transcription.
- Electric conductive type excels in chemical and heat resistance.
- Silicone type excels in chemical and heat resistance.
- With variety of adhesive force it can be applied wide range of articles, such as precision parts, assembling parts, fixtures or tools.


Tac Sheet C-01H

Low out-gassing Adhesion

Non-silicone Type




※The photograph is C-01H-10.



Tac Sheet SRTE-3126-1

Conductive Adhesion Heat resistance Chemical resistance



Conductive Silicone Type



Tac Sheet SRTE-3030-1

Adhesion Heat resistance Chemical resistance

Silicone Type

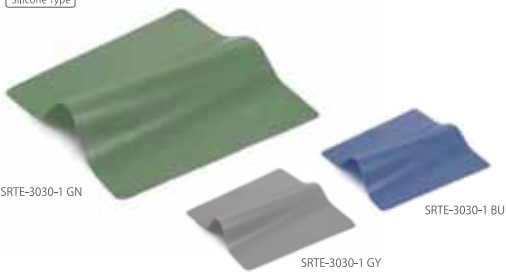

Item No.	Dimensions	Material	Adhesive Force	Color	Front	Back	Remarks
C-01H-10	300×300×t1mm	Non-silicone	10	Clear	Matt surface	Matt surface	Heat resistance: Max90°C
C-01H-20			20				
C-01H-30			30		Mirror surface	Mirror surface	
C-01H-40			40				
SRTE-3126-1	310×260×t1mm	Conductive silicone	30	Black	Mirror surface	Mirror surface	Surface resistivity: 10 ⁹ Ω/□ Heat resistance: Max200°C
SRTE-3030-1 GN	300×300×t1mm	Silicone	30	Green	Mirror surface	Mirror surface	Heat resistance: Max200°C
SRTE-3030-1 BU			40	Blue			
SRTE-3030-1 GY			50	Gray			

Weak → Strong
Adhesion10 Adhesion20 Adhesion30 Adhesion40 Adhesion50
※Adhesive force differs depending on material.

■ Tac Sheet specification Table

Item No.	Dimensions (mm)	Material	Adhesive Force				Color	Front	Reverse	
			Standardized Item : ◎ #1 Special Order : ○ #2							
			Adhesion 20	Adhesion 30	Adhesion 40	Adhesion 50				
SRT-55-S	500×500×1	Silicone	○	◎	○	○	Green	Mirror surface (Only outer is a satin finished surface.)	Matt surface	
SRT-53-S	500×300×1		○	◎	○	○				
SRT-43-S	450×300×1		○	◎	○	○				
SRT-33-S	300×300×1		○	◎	○	○				
SRT-55-1	500×500×	Silicone	○	◎	○	○	Green	Mirror surface	Mirror surface	
SRT-55-1-S			1	○	◎	○			○	Matt surface
SRT-55-1.5			1.5	○	◎	○			○	Mirror surface
SRT-55-1.5-S			1.5	○	◎	○			○	Matt surface
SRT-55-2			2	○	◎	○			○	Mirror surface
SRT-55-2-S			2	○	◎	○			○	Matt surface
SRT-55-3			3	○	◎	○			○	Mirror surface
SRT-55-3-S			3	○	◎	○			○	Matt surface
SRT-53-1	500×300×	Silicone	○	◎	○	○	Green	Mirror surface	Mirror surface	
SRT-53-1-S			1	○	◎	○			○	Matt surface
SRT-53-1.5			1.5	○	◎	○			○	Mirror surface
SRT-53-1.5-S			1.5	○	◎	○			○	Matt surface
SRT-53-2			2	○	◎	○			○	Mirror surface
SRT-53-2-S			2	○	◎	○			○	Matt surface
SRT-53-3			3	○	◎	○			○	Mirror surface
SRT-53-3-S			3	○	◎	○			○	Matt surface
SRT-43-1	400×300×	Silicone	○	◎	○	○	Green	Mirror surface	Mirror surface	
SRT-43-1-S			1	○	◎	○			○	Matt surface
SRT-43-1.5			1.5	○	◎	○			○	Mirror surface
SRT-43-1.5-S			1.5	○	◎	○			○	Matt surface
SRT-43-2			2	○	◎	○			○	Mirror surface
SRT-43-2-S			2	○	◎	○			○	Matt surface
SRT-43-3			3	○	◎	○			○	Mirror surface
SRT-43-3-S			3	○	◎	○			○	Matt surface
SRT-33-0.3	300×300×	Silicone	○	○	○	○	Green	Mirror surface	Mirror surface	
SRT-33-0.5			0.5	○	○	○			○	Mirror surface
SRT-33-1			1	○	◎	○			○	Mirror surface
SRT-33-1-S			1	○	◎	○			○	Matt surface
SRT-33-1.5			1.5	○	◎	○			○	Mirror surface
SRT-33-1.5-S			1.5	○	◎	○			○	Matt surface
SRT-33-2			2	○	◎	○			○	Mirror surface
SRT-33-2-S			2	○	◎	○			○	Matt surface
SRT-33-3			3	○	◎	○			○	Mirror surface
SRT-33-3-S			3	○	◎	○			○	Matt surface

※1 Standardized Item : MOQ 10 ※2 Special Order : MOQ 10

Weak → Strong

Adhesion20 Adhesion30 Adhesion40 Adhesion50

※Adhesive force differs depending on material.

■ Chemical resistance of Tac Sheet silicone type

Chemical		Evaluation
Acid	Hydrochloric acid,10%	◎
	Concentrated hydrochloric acid	○
	Nitric acid,10%	○
	Concentrated nitric acid	△
	Sulfuric acid,10%	◎
	Concentrated sulfuric acid	×
	Acetic acid,10%	○
Alkali	Concentrated acetic acid	○
	Ammonium hydroxide,10%	◎
	Concentrated ammonium hydroxide	◎
	Sodium hydroxide,10%	◎
Organic solvent	Concentrated Sodium hydroxide	○
	Aniline	○
	Isobutyl alcohol	◎
	Isopropyl alcohol	◎
	Ethyl acetate	△
	Butyl acetate	×
	Trichloroethylene	×
	Toluene	×
	Nitrobenzene	×
	Butyl alcohol(Butanol)	○
	Benzene	△
	Methyl alcohol	○
	Methyl ethyl ketone(MEK)	△
	Acetone	△
	Ethyl alcohol	◎
	Carbon tetrachloride	×
Others (Gas,Oil)	Hydrogen peroxide	◎
	Oxygen	◎
	Bromine	△
	Hydrogen	○
	Petroleum	○
	Nitrogen	◎
	Carbon dioxide	△
	Gasoline	△
	Lard	◎
	Silicone oils	×

◎:Excellent ○:Good △:Fair ×:No good



Electric Conductive Closed Container

>>> Conductive Container

- The body is made from electric conductive resin(gray).
- Two types of covers are available. One is made from electric conductive resin and the other is made from anti-static resin(clear).
- It break static electricity and repels dusts.
- As the cover has a silicone packing, it is air tight.
- As antistatic cover is transparent, contents can be easily recognized from outside.
- The body and cover can be easily separated by sliding sideways for easiness of washing.
- It can be stacked up to save space.

Transportation Cart TA-3



Dimensions W620×D425×H900mm
Material Stainless
Remarks FIC-11,12,13,14,
Using combinedly



Usage example

Electric Conductive Closed Container FIC-11BC



Body Conductive Cover Anti-static
Dimensions W525×D398×H190mm
Inner Dimensions W454×D320×H165mm
Material Body : Conductive ABS
Cover : Anti-static ABS
Color Body : Gray
Cover : Clear
Surface resistivity Body:10³Ω/□
Cover:10⁸Ω/□

Electric Conductive Closed Container FIC-12BC



Body Conductive Cover Anti-static
Dimensions W525×D398×H135mm
Inner Dimensions W452×D318×H110mm
Material Body : Conductive ABS
Cover : Anti-static ABS
Color Body : Gray
Cover : Clear
Surface resistivity Body:10³Ω/□
Cover:10⁸Ω/□

Electric Conductive Closed Container FIC-13BC



Body Conductive Cover Anti-static
Dimensions W398×D345×H190mm
Inner Dimensions W327×D267×H165mm
Material Body : Conductive ABS
Cover : Anti-static ABS
Color Body : Gray
Cover : Clear
Surface resistivity Body:10³Ω/□
Cover:10⁸Ω/□

Electric Conductive Closed Container FIC-14BC



Body Conductive Cover Anti-static
Dimensions W398×D345×H135mm
Inner Dimensions W325×D265×H110mm
Material Body : Conductive ABS
Cover : Anti-static ABS
Color Body : Gray
Cover : Clear
Surface resistivity Body:10³Ω/□
Cover:10⁸Ω/□

Electric Conductive Closed Container FIC-11BB



Body Conductive Cover Conductive
Dimensions W525×D398×H190mm
Inner Dimensions W454×D320×H165mm
Material Body : Conductive ABS
Cover : Conductive ABS
Color Body : Gray
Cover : Gray
Surface resistivity 10³Ω/□

Electric Conductive Closed Container FIC-12BB



Body Conductive Cover Conductive
Dimensions W525×D398×H135mm
Inner Dimensions W452×D318×H110mm
Material Body : Conductive ABS
Cover : Conductive ABS
Color Body : Gray
Cover : Gray
Surface resistivity 10³Ω/□

Electric Conductive Closed Container FIC-13BB




Body Conductive Cover Conductive
Dimensions W398×D345×H190mm
Inner Dimensions W327×D267×H165mm
Material Body : Conductive ABS
Cover : Conductive ABS
Color Body : Gray
Cover : Gray
Surface resistivity 10³Ω/□

Electric Conductive Closed Container FIC-14BB




Body Conductive Cover Conductive
Dimensions W398×D345×H135mm
Inner Dimensions W325×D265×H110mm
Material Body : Conductive ABS
Cover : Conductive ABS
Color Body : Gray
Cover : Gray
Surface resistivity 10³Ω/□


FIC-11BC / FIC-11BB




FIC-12BC / FIC-12BB



FIC-13BC / FIC-13BB



FIC-14BC / FIC-14BB





Electric Conductive Tray and Basket

>>> Conductive Tray / Conductive Basket


- They are made from electric conductive resin.
- Because of electric conductivity precision parts can be protected and stored safely.
- They can be transported easily and can be stacked up to save space.
- They can be divided into smaller spaces easily by dividers so that they can accommodate various shapes and sizes. (※ except for FT34-02)
- By using in combination with Tac sheets or pin mats, they can be used for protection and storing various assembling parts, fixtures or tools.
- By using in combination with a cart they can be used for many applications such as for storing various assembling parts, fixtures or tools.

■ Dividers

For FT34-05



For FT34-10





For FB34-10



Electric Conductive Tray FT34-02

Conductive


Dimensions W300×D400×H38mm
Inner Dimensions W254×D354×H25mm
Material Conductive ABS
Surface resistivity $10^4\Omega/\square$




Electric Conductive Tray KT-1

Conductive

Dimensions W85×D85×H23mm
Inner Dimensions W80×D80×H21mm
Material Conductive PS
Surface resistivity $10^4\Omega/\square$



KT-1




FT34-02 can be divided by KT-1 in the tray.

Electric Conductive Tray FT34-05



Conductive

Dimensions W300×D400×H65mm
Inner Dimensions W248×D348×H47mm
Material Conductive ABS
Surface resistivity $10^4\Omega/\square$



Option

※Dividers are optional.



■ Dividers for FT Tray

Item No.	Dimensions
① FPD05-40	W346×H42mm
② FPD05-32	W119×H42mm
③ FPD05-33	W 77×H42mm
④ FPD05-30	W247×H42mm
⑤ FPD05-42	W169×H42mm
⑥ FPD05-43	W110×H42mm

Electric Conductive Tray FT34-10



Conductive

Dimensions W300×D400×H115mm
Inner Dimensions W249×D347×H98mm
Material Conductive ABS
Surface resistivity $10^4\Omega/\square$



Option

※Dividers are optional.



■ Dividers for FT Tray

Item No.	Dimensions
① FPD10-30	W248×H92mm
② FPD10-31	W276×H92mm
③ FPD10-40	W346×H92mm
④ FPD10-32	W119×H92mm
⑤ FPD10-33	W 76×H92mm

Electric Conductive Basket FB34-10



Conductive

Dimensions W300×D400×H115mm
Inner Dimensions W249×D349×H98mm
Material Conductive ABS
Surface resistivity $10^4\Omega/\square$



Option

※Dividers are optional.



■ Dividers for FB Basket

Item No.	Dimensions
① FBD10-41	W347×H88mm
② FBD10-31	W247×H88mm



Top table

Each corner is rounded off to make effects of a repose.

(Material: ABS/Permanent anti-static resin)



Pillar

Matting process makes the user feel not only a superior quality of the product but also a high grade by its placid form.


(Material: Aluminum)



Bumper

The bumper made of elastomer, material of high shock absorption.


(Material: Elastomer)



Steering wheel

Smooth feeling processed onto the surface creates an easy grasp and makes user to feel identified with a sense of unity in handling.

(Material: ABS/Permanent anti-static resin)



Arm

It is designed to keep a good balance with the unit and assures a stable handling.

(Material: PA)



Caster

Excellent smooth and silent revolution.

(Material: Elastomer)

Transportation Cart



>>>Transportation Cart

- The cart is made from light weight but sturdy aluminum frames and anti-static resin.
- It uses high quality casters which are excellent in operation and silent during transportation.
- The size is compact, the amount of accommodation is large.
- It can store and transport precision parts, various assembling parts, fixtures or tools safely.
- It has a function to protect trays or baskets from sliding off.
- It can be used as a desk for a measuring instrument, an inspection instrument, a personal computer or a simple work.
- It can be used for various applications by exchanging trays or baskets among carts.

Compact Cart C43C-ESD01

Quietness


Dimensions W570×D560×H930mm
Ten FT34-05 can be stored.



Compact Cart C43C-ESD02

Quietness



Dimensions W570×D560×H930mm
Five FT34-10 can be stored.



Compact Cart C43C-ESD03

Quietness


Dimensions W570×D560×H930mm
Five FB34-10 can be stored.



Aluminum Cart **C34-DNS214B55A**

Shutter with Key


Dimensions W853×D570×H1249mm



Aluminum Cart **C34-DNS31802SA**

Shutter with Key


W1183×D570×H1481mm



Aluminum Cart **C64-AS10155A**

Shutter with Key


Dimensions W823×D570×H1306mm



Ant-vibration Cart **AVC-01**



Anti-vibration

Dimensions W944×D460×H1175mm




Stainless Cart **C64-T15204A**

Dimensions W1152×D491×H1626mm



Stainless Rack **R64-301**

Dimensions W1930×D445×H1700mm



We have many other types of carts, cabinets and racks in our line-ups suitable for storing or transporting your precision parts. Please feel free to consult with us.

Tac Carrier

Tac Tray

Tac Blade + Pin Mat

Tac Sheet

Electric Conductive Closed Container

Electric Conductive Tray and Basket

Transportation Cart